


Designation	Description
1A0	Double acting cylinder
2A0	Double acting cylinder
1V1	5/2-way solenoid impulse valve
2V1	5/2-way solenoid impulse valve
1V01	One-way flow control valve
2V02	One-way flow control valve
2V01	One-way flow control valve
1V02	One-way flow control valve
	Compressed air supply
	Compressed air supply
	Distance rule
	Distance rule
	Electrical connection 24V
	Electrical connection 0V
2B2	Magnetic proximity switch
1B2	Magnetic proximity switch
K2	Relay
K1	Relay
S1	Pushbutton (make)
K3	Relay
1Y1	Valve solenoid
1Y2	Valve solenoid
2Y2	Valve solenoid
2Y1	Valve solenoid
K3	Make switch
K3	Make switch
S2	Pushbutton (make)
K4	Relay
K4	Make switch
K4	Make switch
K5	Make switch
K5	Make switch
K6	Relay
K1	Make switch
K2	Make switch
K5	Make switch
K4	Make switch
K5	Relay with switch-on delay
K6	Break switch

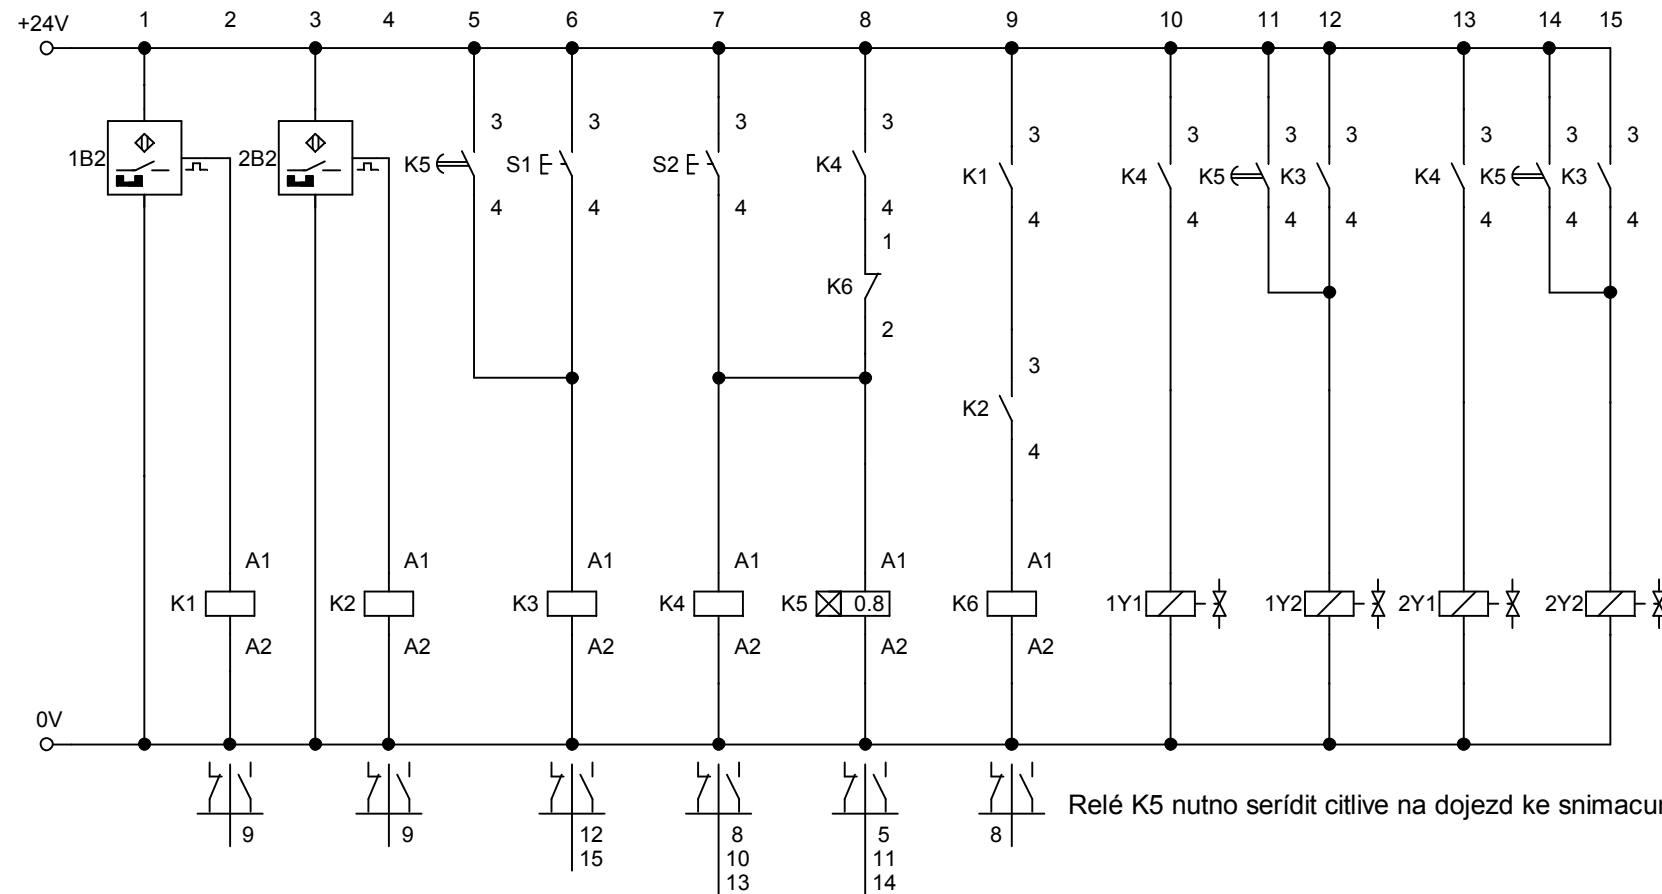

Relé K5 nutno serídít citlive na dojezd ke snímacum 1B1 a 1B2